


STATISTICS								
DESCRIPTION	AVGERAGE	MAX	MIN	MAX:MIN	AVG:MIN			
AREA BOUND PROPERTY LINE	15.9 LUX	258.1 LUX	0.0 LUX	N/A	N/A			
AREA BOUND BY ASPHALT	44.0 LUX	258.1 LUX	5.6 LUX	46.1:1	7.9:1			
AREA BOUND UNDER CANOPY	204.7 LUX	258.1 LUX	135.9 LUX	1.9:1	1.5:1			

- ILLUMINANCE IN LUX AT THE GROUND LEVEL
- LOCATION OF LUMINARY WITH LETTER DENOTING TYPE OF
- ARROW INDICATES MOUNTING DIRECTION OF FIXTURE WITH DIRECTIONAL OPTICS



- CONFIRM ANCHOR BOLT CIRCLE DIMENSIONS WITH POLE MFR. BEFORE CONSTRUCTING BASE ALL STRUCTURAL DESIGN ELEMENTS BY OTHERS, CONSULT STRUCTURAL ENGINEER, GEOTECH REPORT AND ENGAGE SOIL ENGINEER BEFORE CONSTRUCTING BASE STRUCUTRAL ENGINEER TO CONFIRM ANCHOR BOLT SIZING AND CONCRETE SPECIFICATIONS

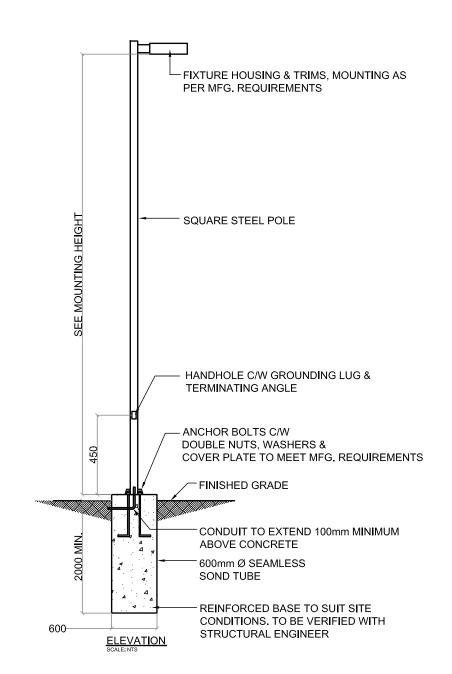

KEY PLAN



GENERAL NOTES:

- 1. VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- 2. DO NOT SCALE DRAWINGS. 3. REPORT ALL DISCOVERIES OF ERRORS, OMISSIONS OR DISCREPANCIES TO THE ARCHITECT OR
- DESIGN ENGINEER AS APPLICABLE.
- 4. USE ONLY LATEST REVISED DRAWINGS OR THOSE THAT ARE MARKED "ISSUED FOR
- 5. DESIGN AND CONSTRUCTION OF THIS PROJECT SHALL COMPLY WITH THE PROVINCIAL AND LOCAL BUILDING CODES LATEST EDITION. 6. ALL WORKS AND MATERIALS USED SHALL COMPLY AS REQUIRED BY THE O.B.C. LATEST EDITION.
- 7. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT DRAWINGS &
- 8. ALL DIMENSIONS SHOWN ARE IN MILLIMETER.
- EVERYTHING IS TO BE CONSIDERED NEW UNLESS NOTED "EXISTING" OTHERWISE.
 SURVEY PREPARED BY GREG BISHOP SURVEYING AND CONSULTING GROUP

LIGHTING NOTES:

- 1. DO NOT SCALE DRAWING, ALL LOCATIONS AND SITE CONDITIONS ARE TO BE REVIEWED AND CONFIRMED BY THE CONTRACTOR/OWNER/SUPPLIER PRIOR TO ORDERING EQUIPMENT.
- 2. ALL CABLE/CONDUIT ROUTING AND TERMINATIONS WILL BE THE RESPONSIBILITY OF THE
- ELECTRICAL CONTRACTOR AND WILL SUIT FIELD CONDITIONS AND EQUIPMENT LOCATION. 3. PHOTOMETRIC DOES NOT ACCOUNT FOR ADDITIONAL LIGHTING FROM OTHER POSSIBLE SOURCES
- INCLUDING EXISTING LIGHTING FIXTURES ON ADJACENT OR CITY PROPERTIES. 4. ELECTRICAL CONTRACTOR TO INSTALL ALL FIXTURES ACCORDING TO LATEST EDITION OF
- ELECTRICAL CODE AND MANUFACTURERS RECOMMENDATIONS. 5. ALL EXTERIOR LIGHTING SHALL BE CONTROLLED BY PHOTOVOLTAIC SENSORS.
- 6. ELECTRICAL CONTRACTOR SHALL:
- 6.1. PROVIDE ALL LABOUR, MATERIAL AND EQUIPMENT NECESSARY TO COMPLETE ALL ELECTRICAL WORK TO ALL APPLICABLE CODES, BEST INDUSTRY PRACTICES AND WORKMANSHIP.
- 6.2. COORDINATE INSTALLATION OF ELECTRICAL FEEDS WITH OWNER AND OTHER TRADES.
- 6.3. APPLY FOR, OBTAIN AND PAY FOR ALL PERMITS, LICENSES, INSPECTIONS, EXAMINATIONS AND FEES REQUIRED TO COMPLETE ALL ELECTRICAL WORK. ITEMS INCLUDE BUT NOT LIMITED TO ESA REVIEW AND APPROVALS, THIRD PARTY VERIFICATION, ESA INSPECTIONS, ETC...



REVISIONS	APRVD	JEF			
	Description	ISSUED FOR SPA			
	REV Date	2024.01.18			
	REV	1			
File	No.		210	7-33	5-(
1					

PP01